

Autoblipper Honda CRF1000L/L2, CRF1100L Africa Twin from 2017- , XL750 Transalp from 2025


Manual for activating the quickshifter and blipper (plug and play)

Application: Honda CRF1000L/L2 2017, 2018 and 2019.

Needed: Cordona GP ASG Evo Superbike 430

Included in the item 430Evo kit;

GP ASG Superbike Quickshifter – Blipper	1x
99mm aluminium rod, Africa Twin	1x
Alternative 80mm aluminium rod, Transalp	1x
Left studs/pin bolts	2x
Right stud/pin bolt	1x
Left nuts	4x
Right nut	2x
Cable ties	4x

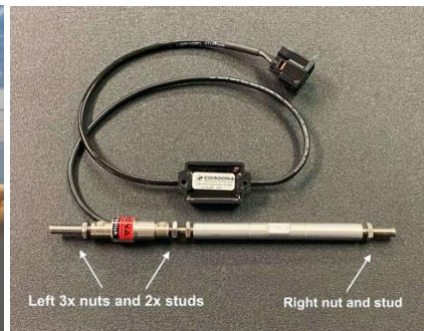

Pic 1. Cordona rod linkage



Wire Service plug

1. Pre assembly the new Cordona sensor linkage according to Picture 1
2. Measure your height on the gear lever before remove from bike
3. **Africa Twin:** Follow installation manual for OEM Quick Shifter P/N 08U70-MKK-D00 at <https://www.access-honda.com/upload/files/08U70-MKK-D00.pdf> for installation and activation of quickshifter and autoblipper function.
Battery (-) negative cable needs to be disconnected.
Jump service red plug with a wire, see photo.

Transalp: Connect the EUR5 jumper connector to bike service plug. The bike service mode is enabled. Activate the QS function in the menu. Turn off the ignition and remove the EUR5 jumper connector.
When bike is turned on, the QS function shall be visible and activated in dash menu.

4. Install the Cordona GP ASG instead of OEM Quick Shifter and adjust rod linkage length to preferred gear lever height. Tighten nuts.
The led on the load cell module shall flash 2 times when bike ignition is turned ON. The units come with pre-configured direction (2 flashes means PUSH sensor for upshift). If direction need to be changed, please check instruction video at www.cordona.net/downloads
5. Enjoy your gear shifts!